

DB 100S 6m T250E H3 W6 B

surface mounted on asphalt

K733116A


PRODUCT DATA SHEET


Performance class	H3 W6 B
Working width	2,0 m
Vehicle intrusion	VI7 (2,2 m)
Dynamic deflection	1,4 m
Tested system length	90 m
EC Certification report	79804 1 / Mod. 79804 2

System series	DB 100 Series
Tension bar	T250E
Design	Generation 2

Element length	6 m
System height	100 cm
System width	64 cm
Element weight/length	3.950 kg/6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	with standard concrete
Terminal anchoring	no
Installation drawing	K733116-EN

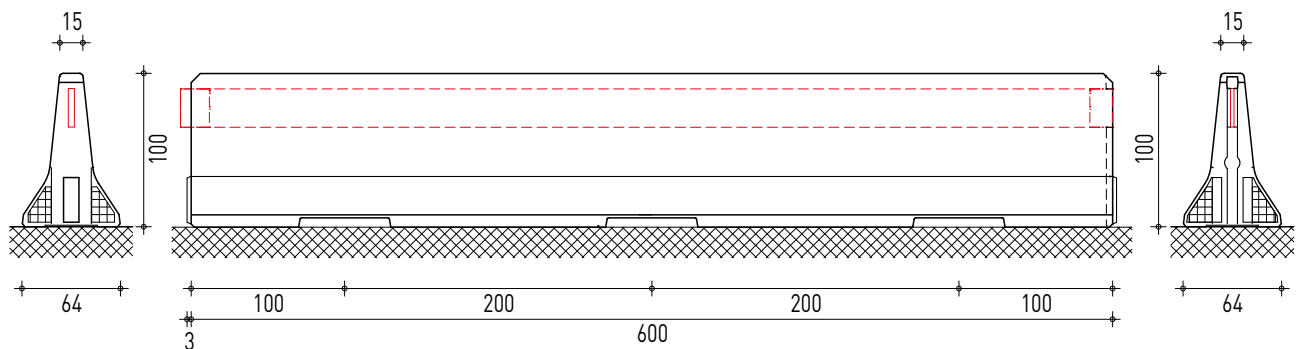

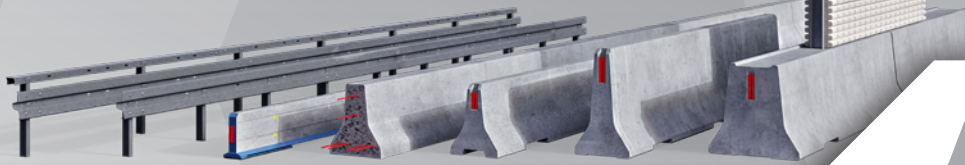

DB 100S 6m T250E H3 W6 B

surface mounted on asphalt

K733069A


PRODUCT DATA SHEET

Performance class	H3 W6 B
Working width	2,0 m
Vehicle intrusion	VI7 (2,2 m)
Dynamic deflection	1,4 m
Tested system length	90 m
EC Certification report	

System series	DB 100 Series
Tension bar	T250E
Design	Generation 2

Element length	6 m
System height	100 cm
System width	64 cm
Element weight/length	3.950 kg/6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	with ZERO DEBRIS CONCRETE
Terminal anchoring	no
Installation drawing	K733069-EN

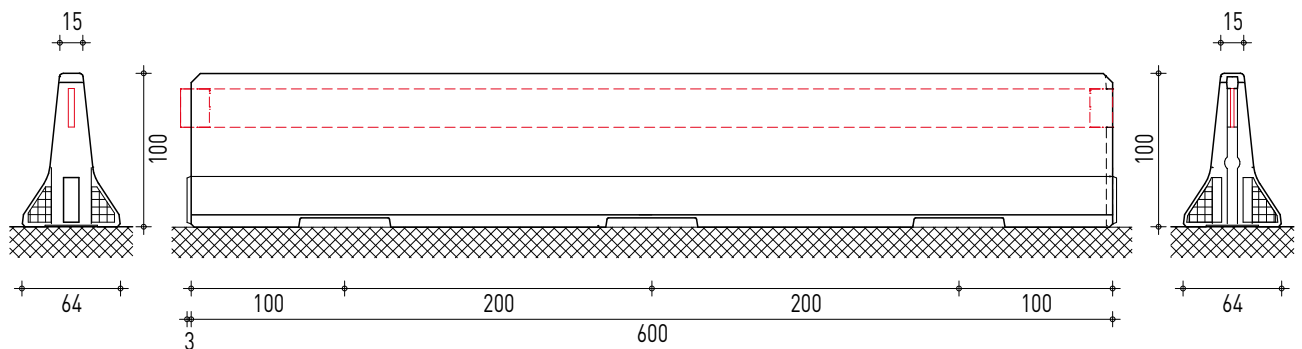

THE NEW DB 100 SERIES PROTECTS WITH BEST PERFORMANCE

The reliable safety concept
for the median and the roadside.



KIRCHDORFER
ROAD & TRAFFIC



DELTA BLOC INTERNATIONAL GmbH

Industriestrasse 28
2601 Sollenau, Austria
office@deltabloc.com
+43 57715 / 470 - 0
www.deltabloc.com